


## Folding back the backrest

1. Return the rear seat backrest to the upright seating position and engage it.
2. Release the belt tongue from the fixture on the rear window shelf.
3. Insert the belt tongue in the belt lock of the center safety belt. Make sure you hear the latch plate engage.

## Fold down the center section

1. Fold down the center head restraint.
2. Press the button and pull the center section forward.

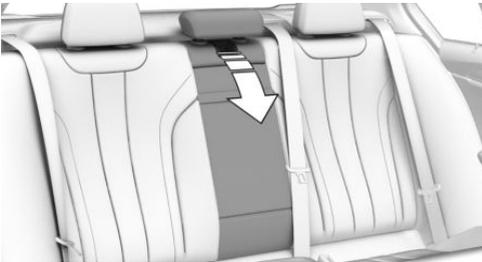


## With an emergency wheel: enlarging the cargo area

### Concept


The emergency wheel and any related components can be temporarily removed to enlarged the cargo area.

## Removing the emergency wheel and the storage compartments


1. Remove the cargo floor panel. To do this, pull the cargo floor panel upward directly behind the rear backrests.

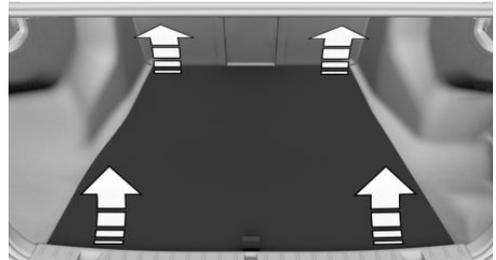


2. Open the ratchet strap.
3. Remove the tool holder.

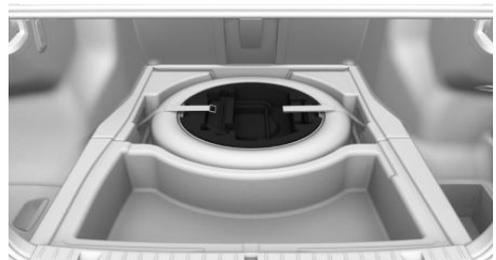

4. Remove the emergency wheel from the storage well.
5. Loosen the ratchet strap from the lashing eyes.
6. Remove the storage compartment.

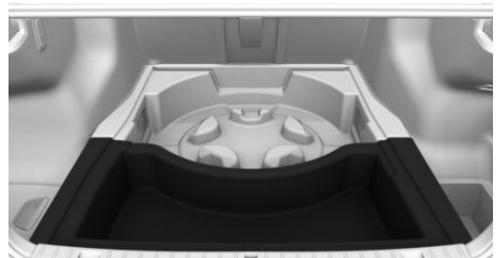

7. Remove the storage well

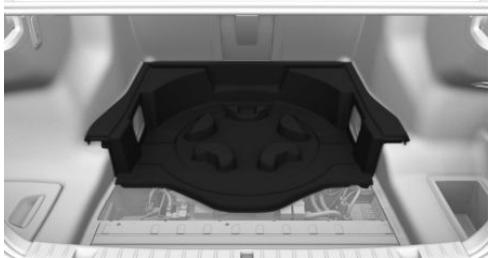

8. Insert the cargo floor panel.

## Inserting the emergency wheel and the storage compartments

Proceed in reverse order to insert the emergency wheel and the storage compartments.

## Ski and snowboard bag

The ski and snowboard bag is contained in a protective jacket in the cargo area.

Follow the installation and owner's manual included in the protective jacket.

Depending on the vehicle equipment: remove the emergency wheel from the vehicle to mount the ski and snowboard bag.